
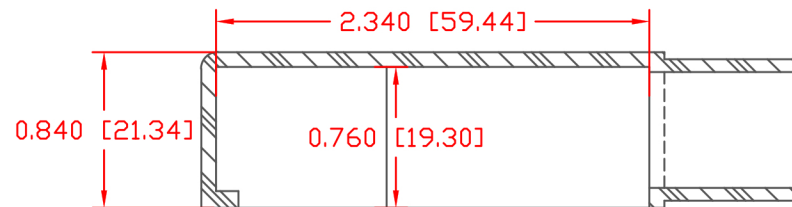


LTR.	REVISIONS	DATE	INT.
	UPDATED .080 [2.0] TO .090 [2.3]	3-8-17	RAS

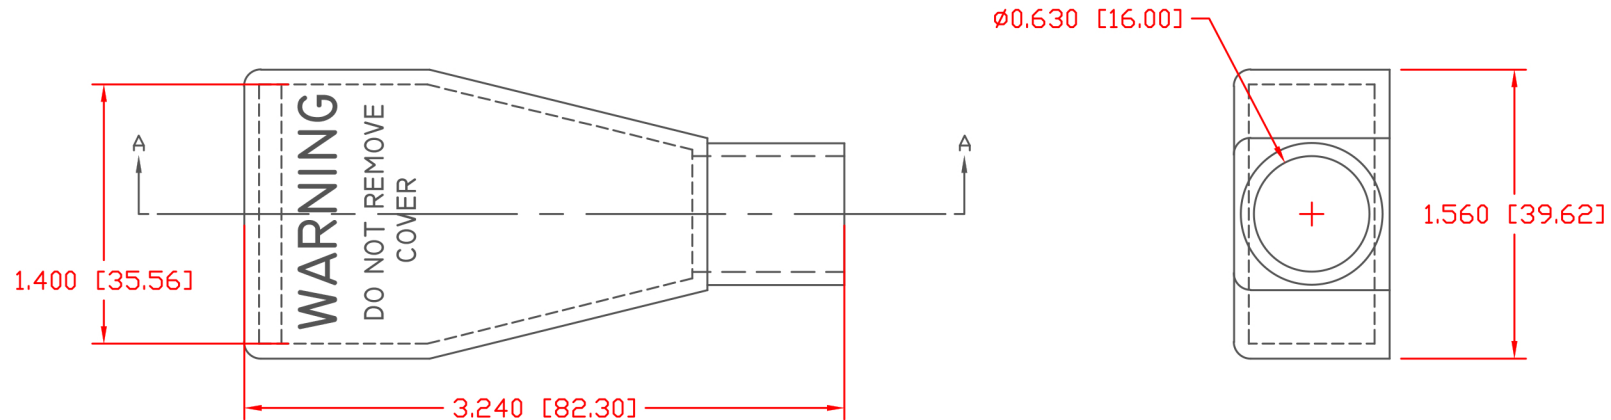

SECTION A-A
TYP. WALL THICKNESS = .090" [2.3]
TYP. RADIUS = .090" [2.3]

ALL DIMENSIONS GIVEN AS: in [mm]
MOLDED PARTS: $\pm 0.030"$ [$\pm 0.8\text{mm}$]

MATERIAL:	PVC
VENDOR PART NO:	9812-65-RED 683
SHORE DUROMETER:	"A" 10 SEC. 65
SPECIFIC GRAVITY:	1.34
ULT. ELONGATION %:	400
MELTING TEMP:	315-335 F [157-168 C]
BRITTLE TEMP:	-54 F [-48 C]
TENSILE STRENGTH PSI:	1550 PSI
DIELECTRIC STRENGTH, V./mil	511
U.L. RATING:	V2

DO NOT SCALE



REF:	DATE:	DRN BY: JC	WEIGHT:
CUSTOMER DIMS	03-27-98	CHK'D BY: JC	.037 LBS [16.7 g]
TITLE: BATTERY CABLE BOOT			
MATERIAL: PVC			PART NO. 670148
COLOR: RED	DRG CLASS	REV A	