
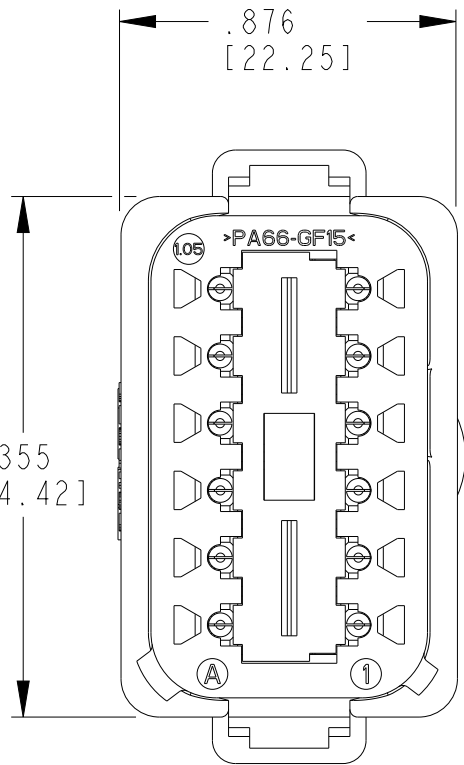
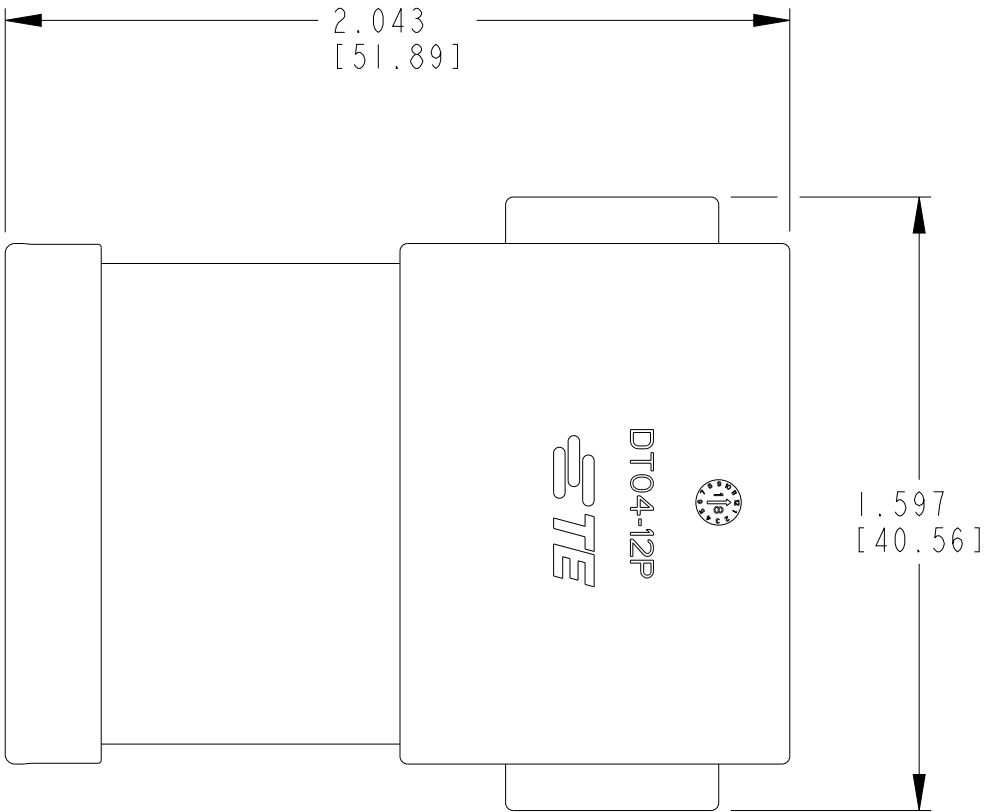
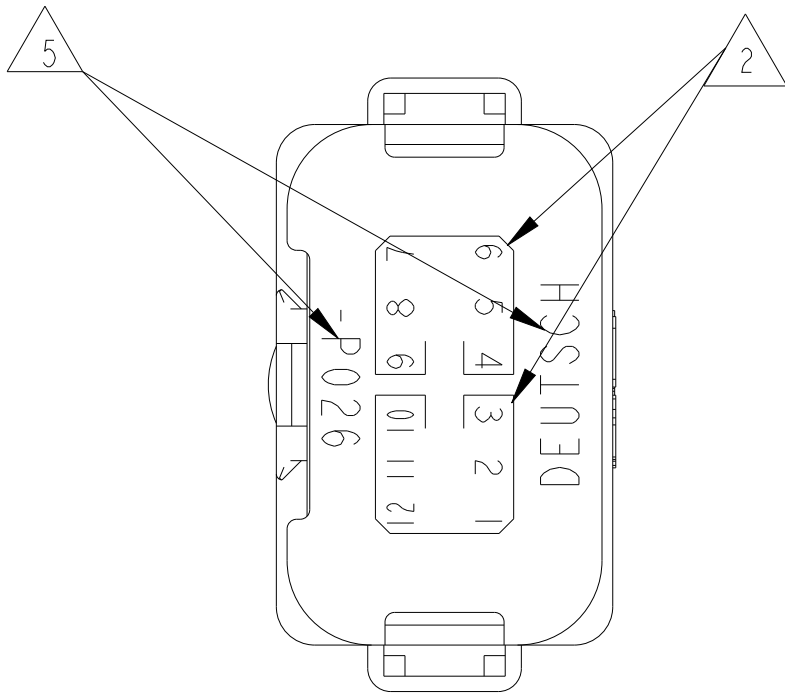


3D VIEW

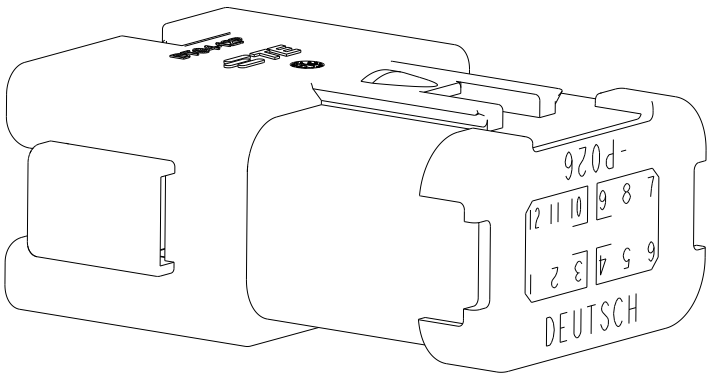

5. ORIENTATION OF "DEUTSCH" AND "-P026" TO BE OPTIONAL.


4. MATERIAL:
CONNECTOR: PA66 GF15, GRAY
CAP: PA66 GF15, BLACK
WEDGE LOCK (INCLUDED): PBT GF30 (GREEN)
PINS: COPPER ALLOY, NICKEL PLATED

3. THE MAXIMUM CURRENT RATING FOR THE 6 PIN BUSBARS IS 39 AMPS, 13 AMPS PER PIN.

2. BORDER SIGNIFIES THAT PINS 1,2,3,10,11,12 AND PINS 4,5,6,7,8, 9 ARE BUSSED TOGETHER WITH 6 PIN BUSBARS.

1. MATES WITH DT06-12SA-XXXX (XXXX = ALL MODIFICATIONS). CONSULT FACTORY FOR MODIFICATIONS.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. BURKE	02MAY2000	 TE Connectivity		
		CHK -	05MAY2000			
		APVD -	05MAY2000			
		PRODUCT SPEC 108-151009				
DIMENSIONS: INCHES[mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME DT 12 WAY RECEPTACLE KEY ARRANGEMENT A (2) 6 PIN BUSBARS - NICKEL PLATED COLOR: GREY		
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025[0,63] 4 PLC ± ANGLES ±		SIZE A3		
		FINISH		CAGE CODE 00779		
MATERIAL 				DRAWING NO G-DT04-12PA-P026		
				RESTRICTED TO -		
				SCALE 2:1		
				SHEET 1 OF 1		
				REV BI		
				CUSTOMER DRAWING		