

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

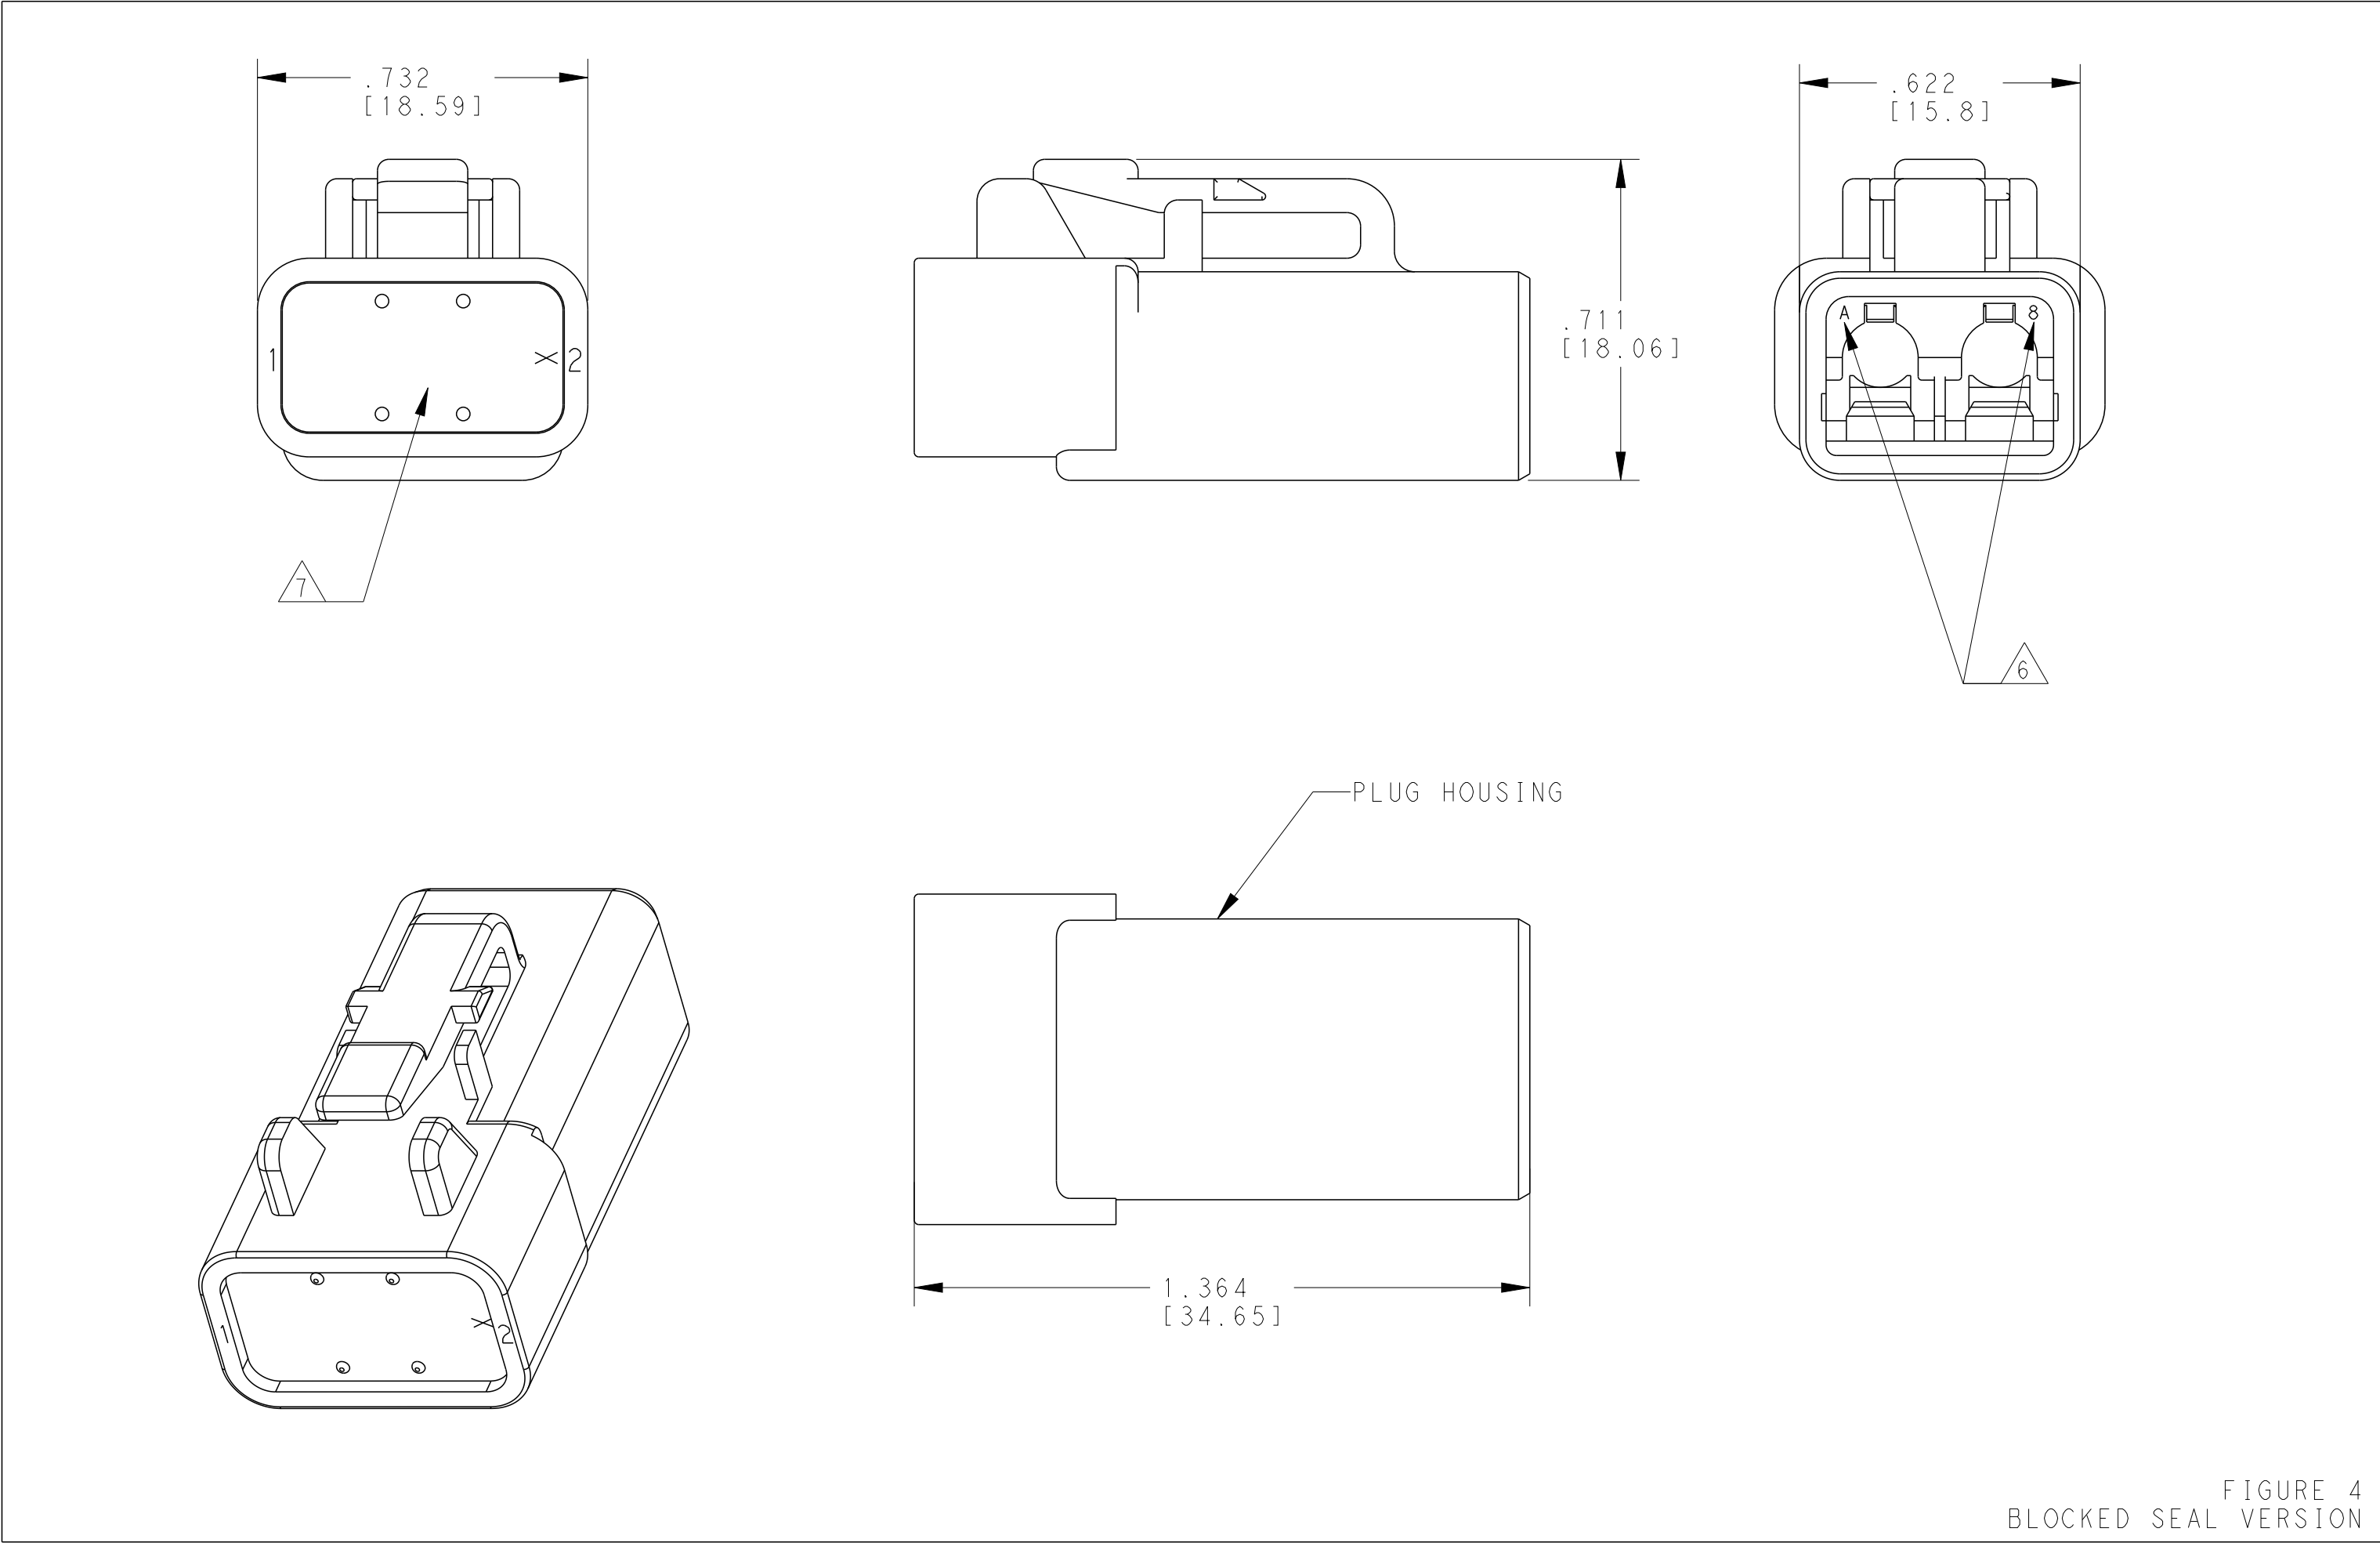


FIGURE 4
BLOCKED SEAL VERSION

 MODIFICATION: GROMMET CONTACT CAVITIES ARE BLOCKED

NOTES:

PART NUMBER	CONTACT SIZE	WIRE RANGE [mm ²] REF ONLY	SEAL	MIN. INSUL. O. D.	MAX. INSUL. O. D.
DTP06-2S	12	10-14 AWG [5.0-2.0]	STANDARD SEAL	.134 [3.40]	.170 [4.32]
DTP06-2S-E004					
DTP06-2S-E003					
DTP06-2S-EE01					
DTP06-2S-C015					
DTP06-2S-CE01			E SEAL	.097 [2.46]	.158 [4.01]
DTP06-2S-CE02					
DTP06-2S-CE03					
DTP06-2S-CE09					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. ARAUS CHK C. BHATT APVD C. BHATT	17JAN2025 06JAN2025 06JAN2025	 TE Connectivity	
DIMENSIONS: IN [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH	± ± ± ± 025 (0.64) ± ± -	PRODUCT SPEC 108-151012 APPLICATION SPEC 114-151012 WEIGHT -	NAME 2 WAY PLUG, STANDARD SEAL EXTRA THIN SEAL, BLOCKED SEAL SHORT AND LONG CAP, DTP SERIES
MATERIAL SEE SHEET 1 -	- -	CUSTOMER DRAWING		SIZE A	CAGE CODE 00779
		DRAWING NO DTP06-2S-XXXX		RESTRICTED TO -	
		SCALE 3:1	SHEET 2	OF 2	REV A1