
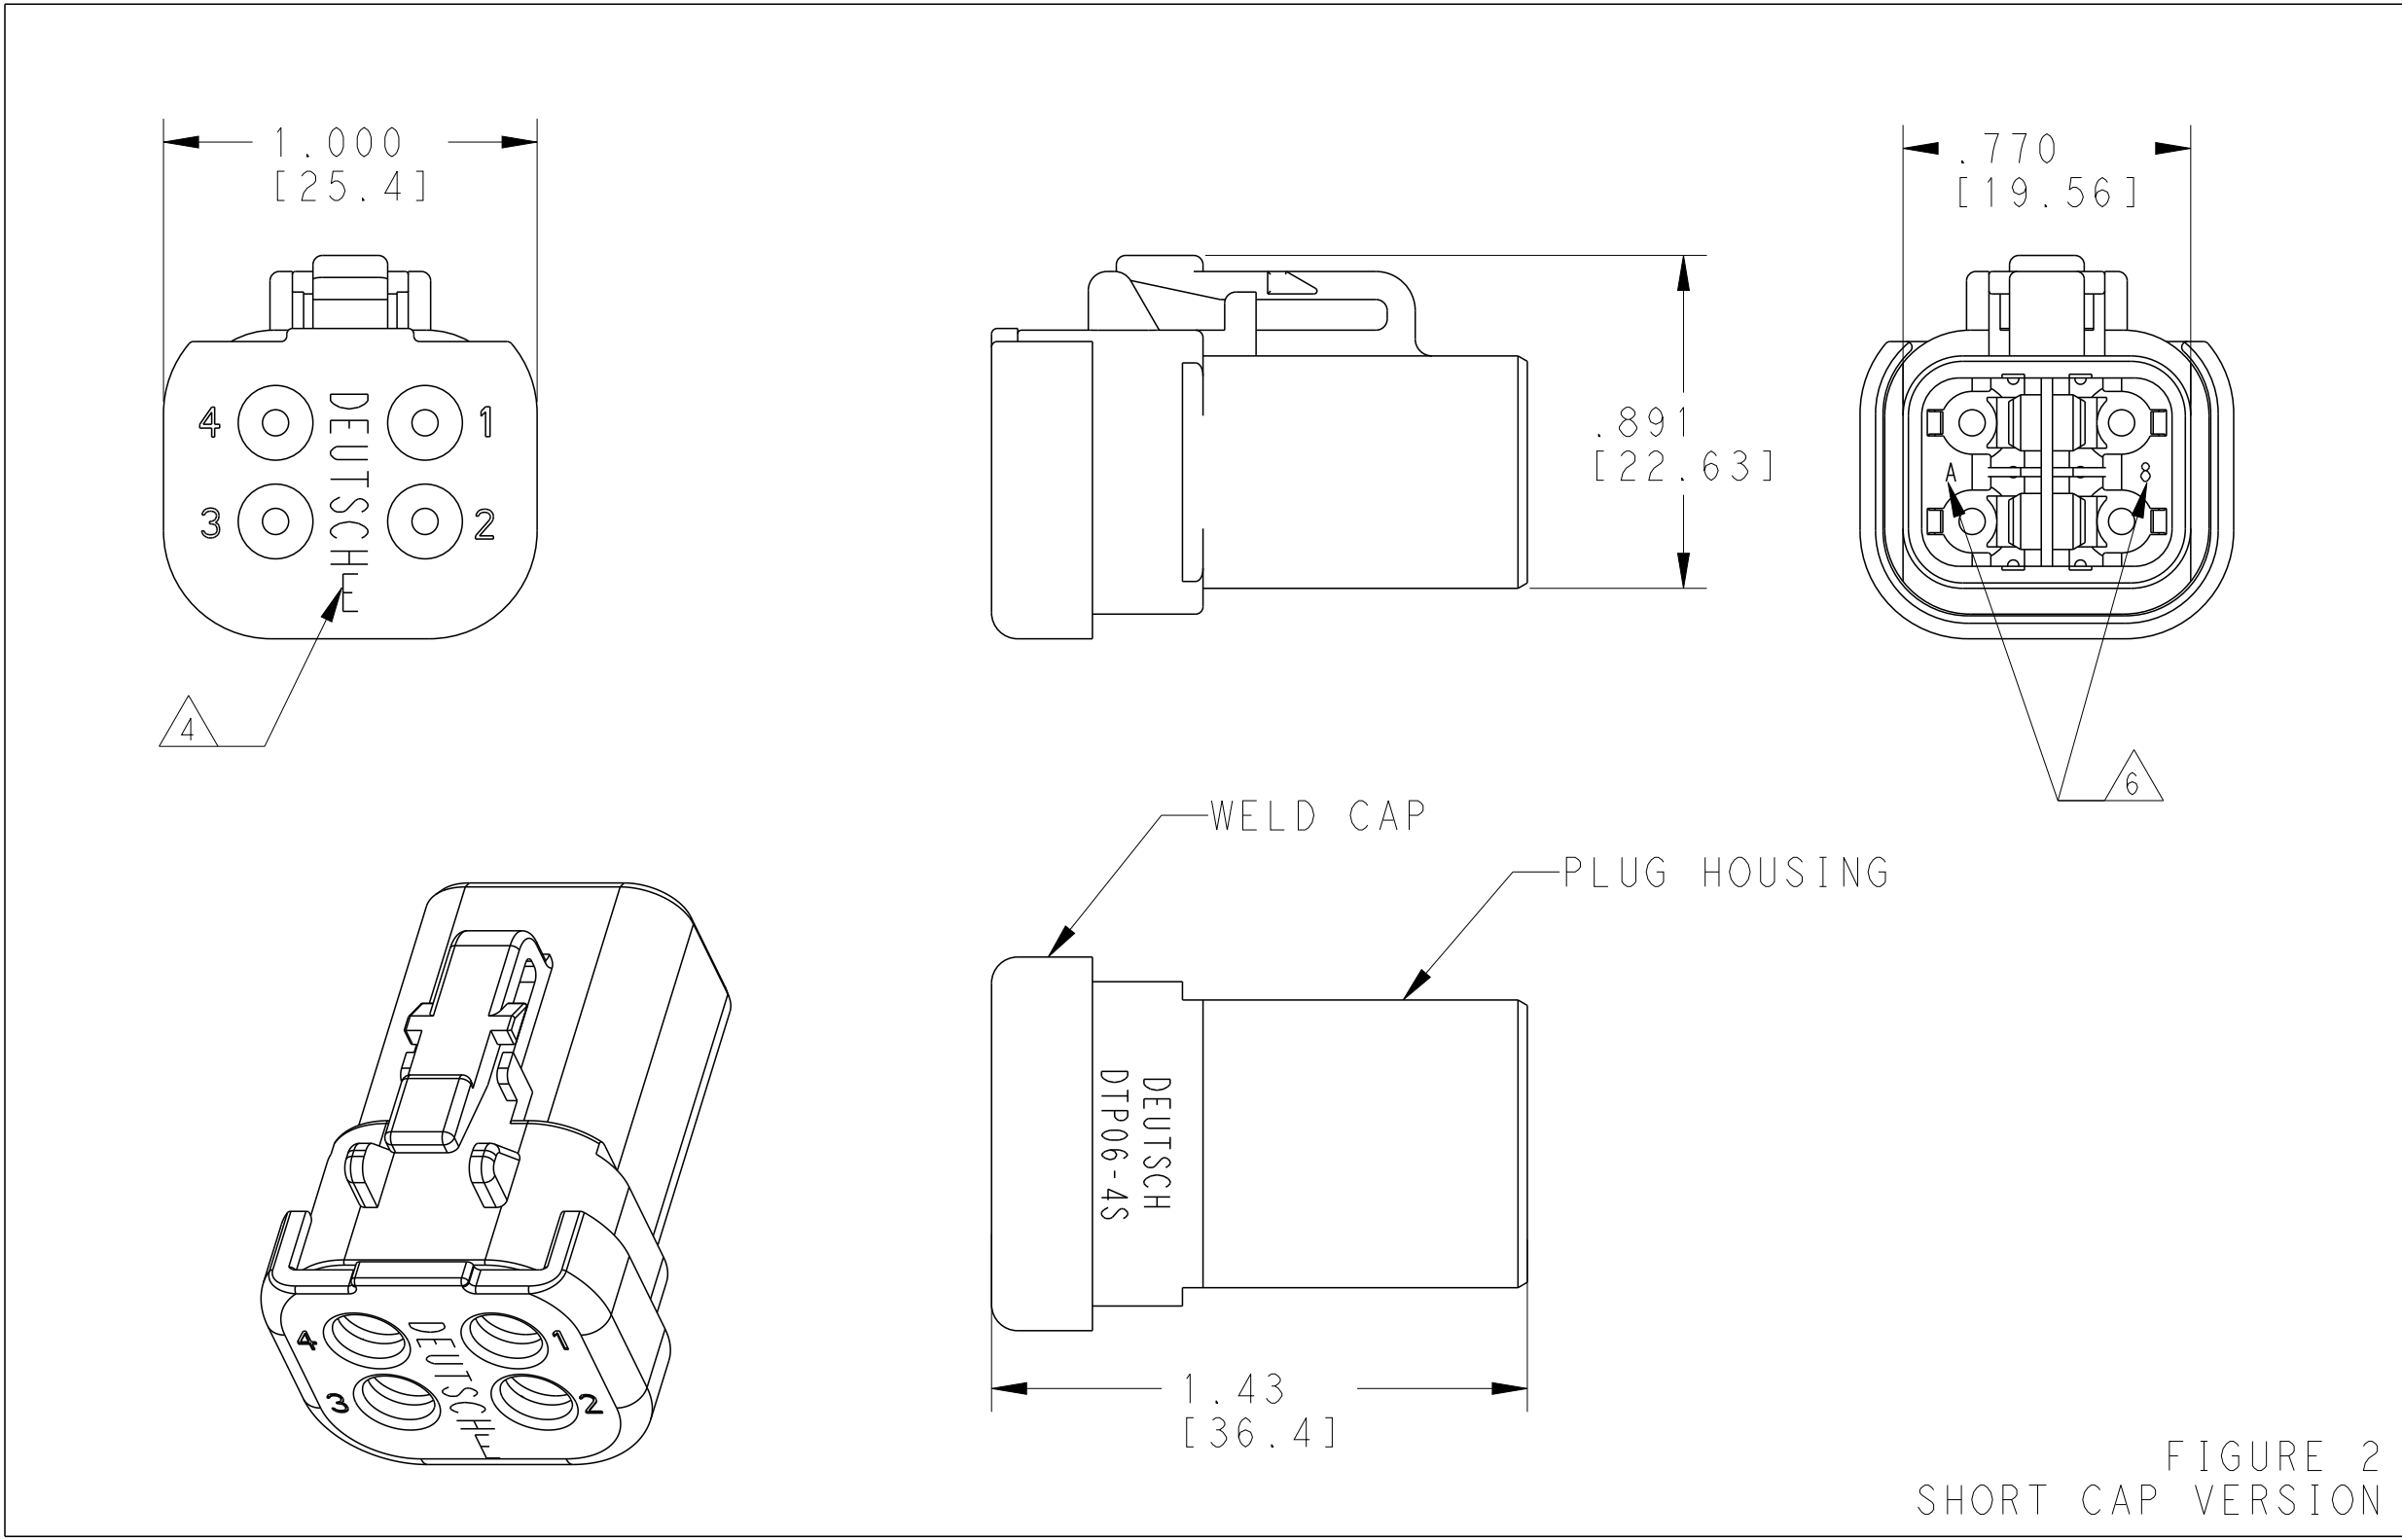
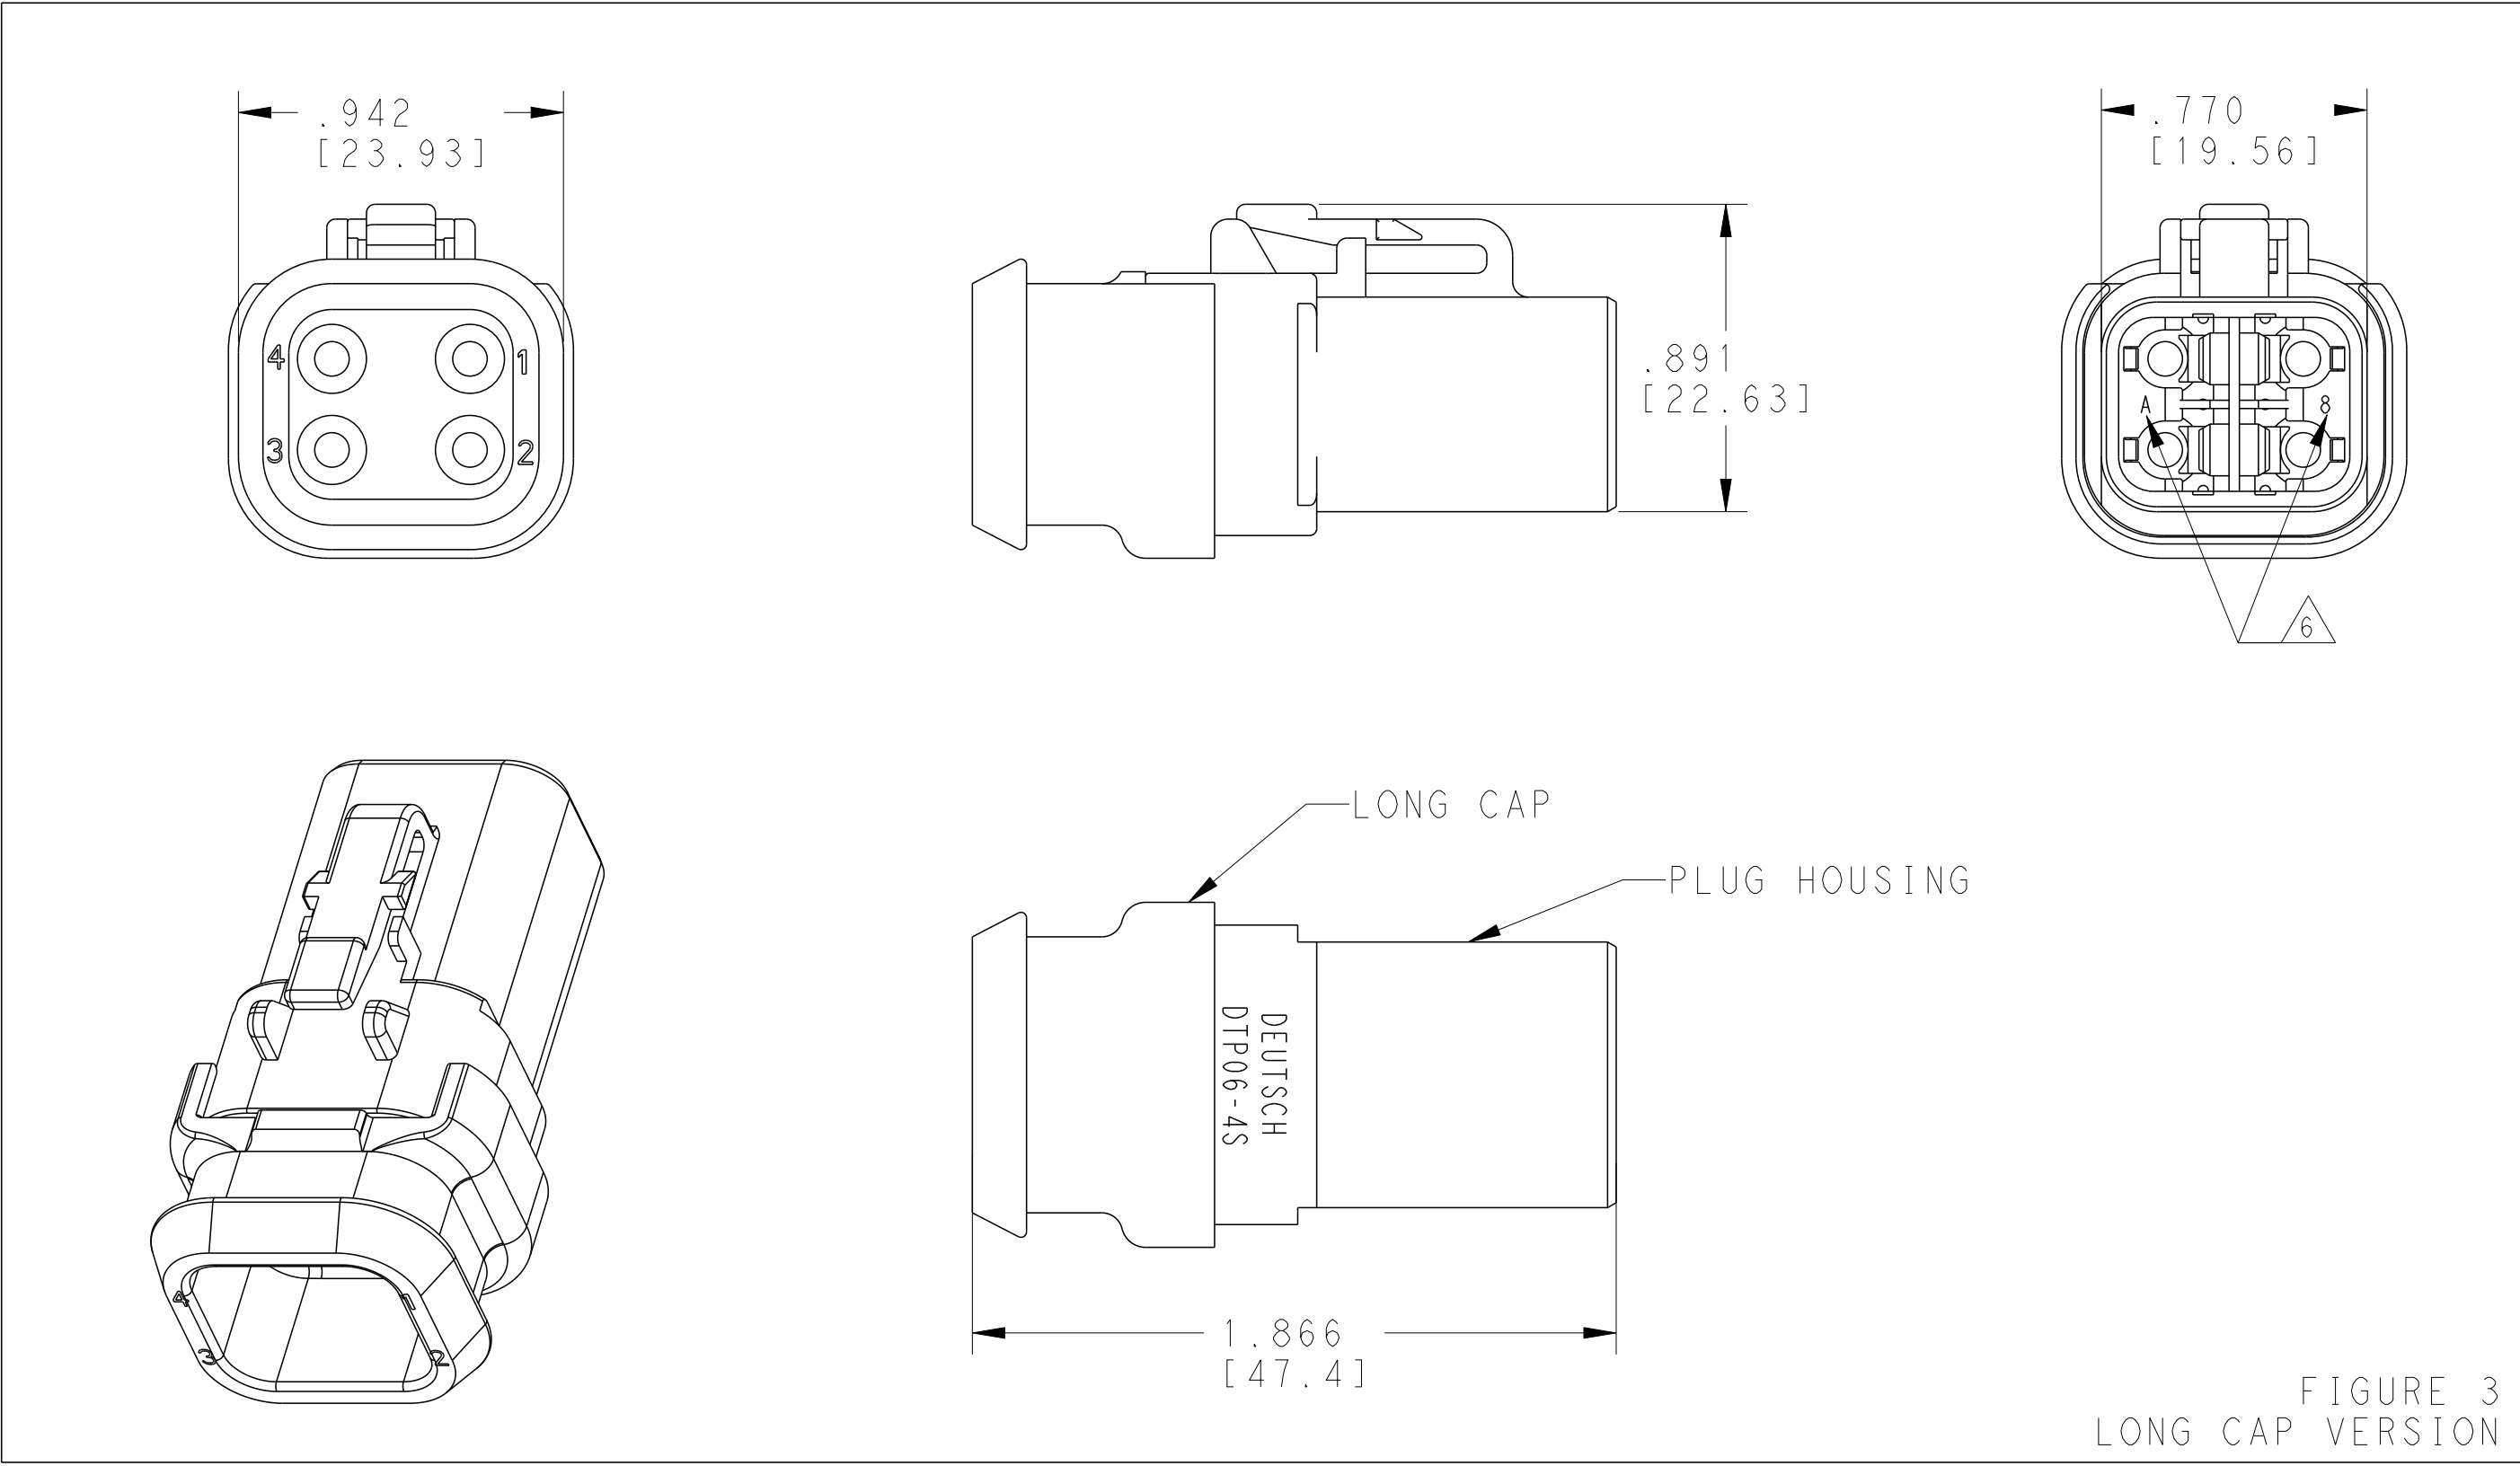


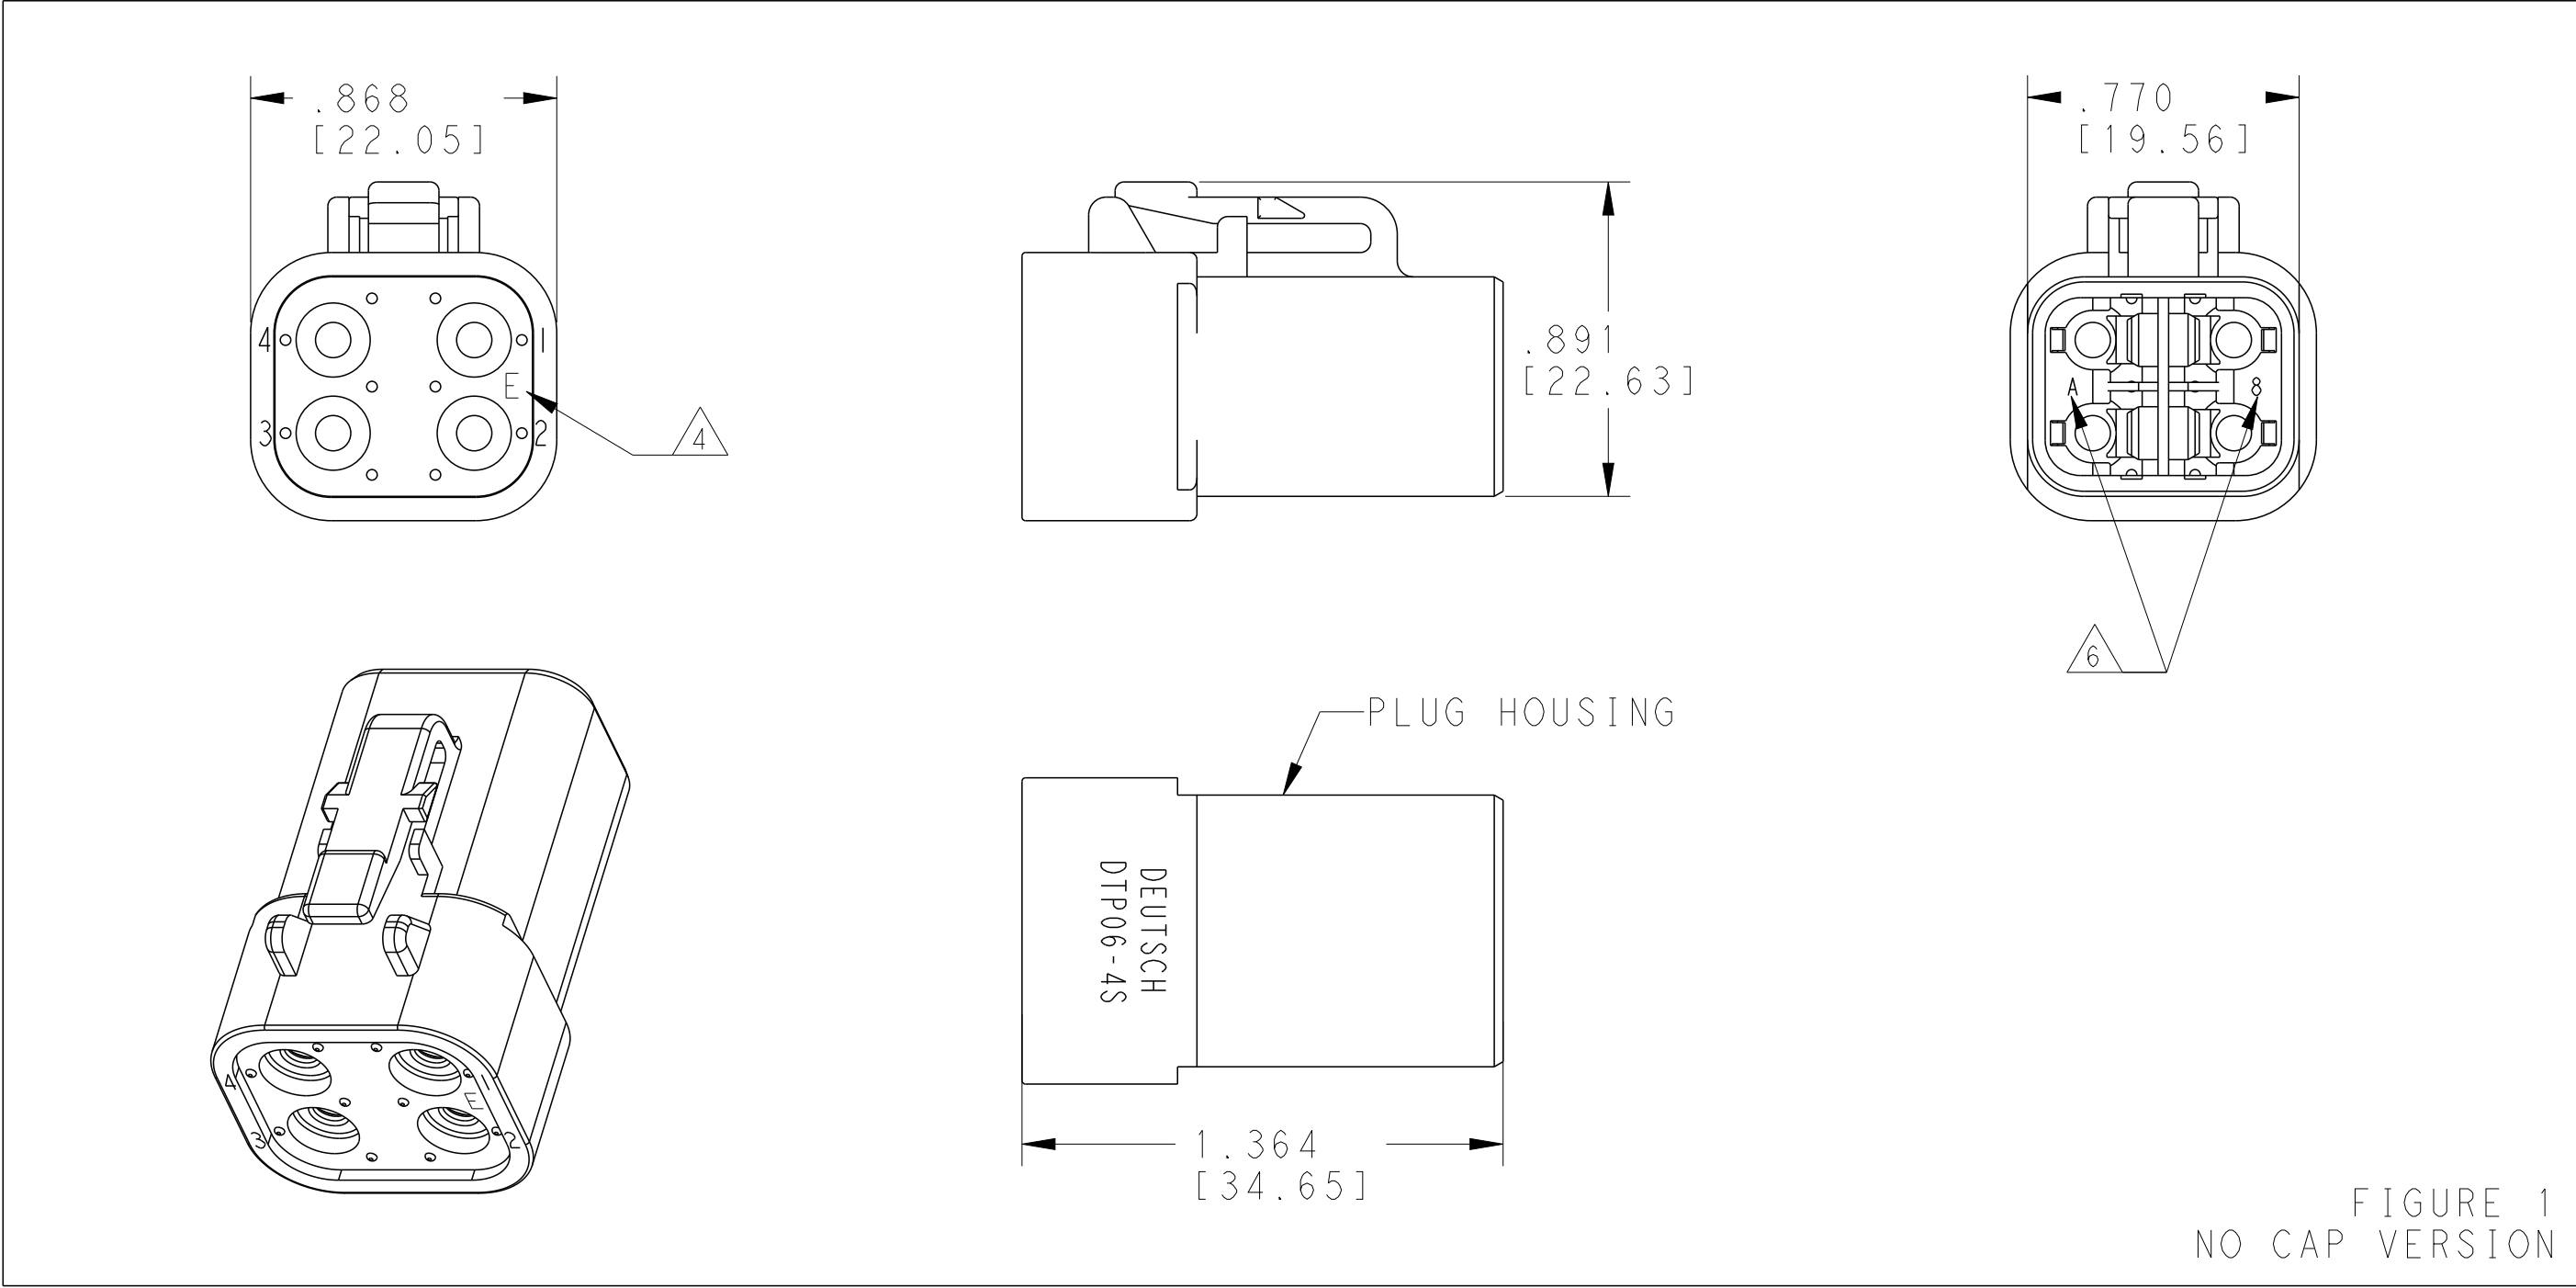

△ "E" IDENTIFIES E-SEAL, LOCATED APROX. AS SHOWN

△ MATERIAL: HOUSING: PA66 GF15, SEE TABLE FOR COLOR
SHORT, LONG CAP: PA66 GF15, SEE TABLE FOR COLOR
GROMMET: E-SEAL VMQ (RED-ORANGE)
N-SEAL VMQ (BURNT ORANGE)
BLOCKED VMQ (BURNT ORANGE)

2. THIS PLUG MATES WITH DTP04-4P-XXXX RECEPTACLE.
(XXXX= ALL MODIFICATIONS)

1. SECONDARY WEDGE LOCK SOLD SEPARATELY: WP-4S

NOTES: UNLESS OTHERWISE SPECIFIED

△ PARTS MARKED FOR INTERNAL USE ONLY
- DATE CODE: MONTH USES SEQUENTIAL ALPHA
CHARACTERS, EX: A= JANUARY
YEAR USES LAST NUMERIAL DIGIT, EX: 4=2024

△ FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION
CHARACTERISTICS SEE PRODUCT SPECIFICATION
108-151000

TE INTERNAL PART NUMBER	DEUTSCH PART NUMBER	HOUSING COLOR	STANDARD SEAL	EXTRA THIN E SEAL	BLOCKED SEAL	SHORT CAP	LONG CAP	FIGURE
DTP06-4S	DTP06-4S	GRAY	X					1
DTP06-4S-C015	DTP06-4S-C015	GRAY		X				1
DTP06-4S-C017	DTP06-4S-C017	GRAY			X			4
DTP06-4S-CE01	DTP06-4S-CE01	GRAY		X		X		2
DTP06-4S-CE02	DTP06-4S-CE02	BLACK		X				1
DTP06-4S-CE03	DTP06-4S-CE03	BLACK		X		X		2
DTP06-4S-E003	DTP06-4S-E003	GRAY	X			X		2
DTP06-4S-E004	DTP06-4S-E004	BLACK	X					1
DTP06-4S-EE01	DTP06-4S-EE01	BLACK	X				X	3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
[IN(mm)]

MATERIAL
△

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 (0.64)
4 PLC ±
ANGLES
FINISH

-

OWN
R. ARAUS
CHK
C. BHATT
APVD
S. BHATT

16JAN2025
14JAN25
14JAN25

PRODUCT SPEC
108-151012
APPLICATION SPEC
114-151012
WEIGHT

CUSTOMER DRAWING

NAME
4 WAY PLUG, STANDARD SEAL,
EXTRA THIN SEAL, BLOCKED SEAL,
SHORT AND LONG CAP, DTP SERIES

SIZE
A

CAGE CODE
00779

DRAWING NO
C=DTP06-4S-XXXX

RESTRICTED TO
-

SCALE
3:1

SHEET
1

OF
2

REV
A

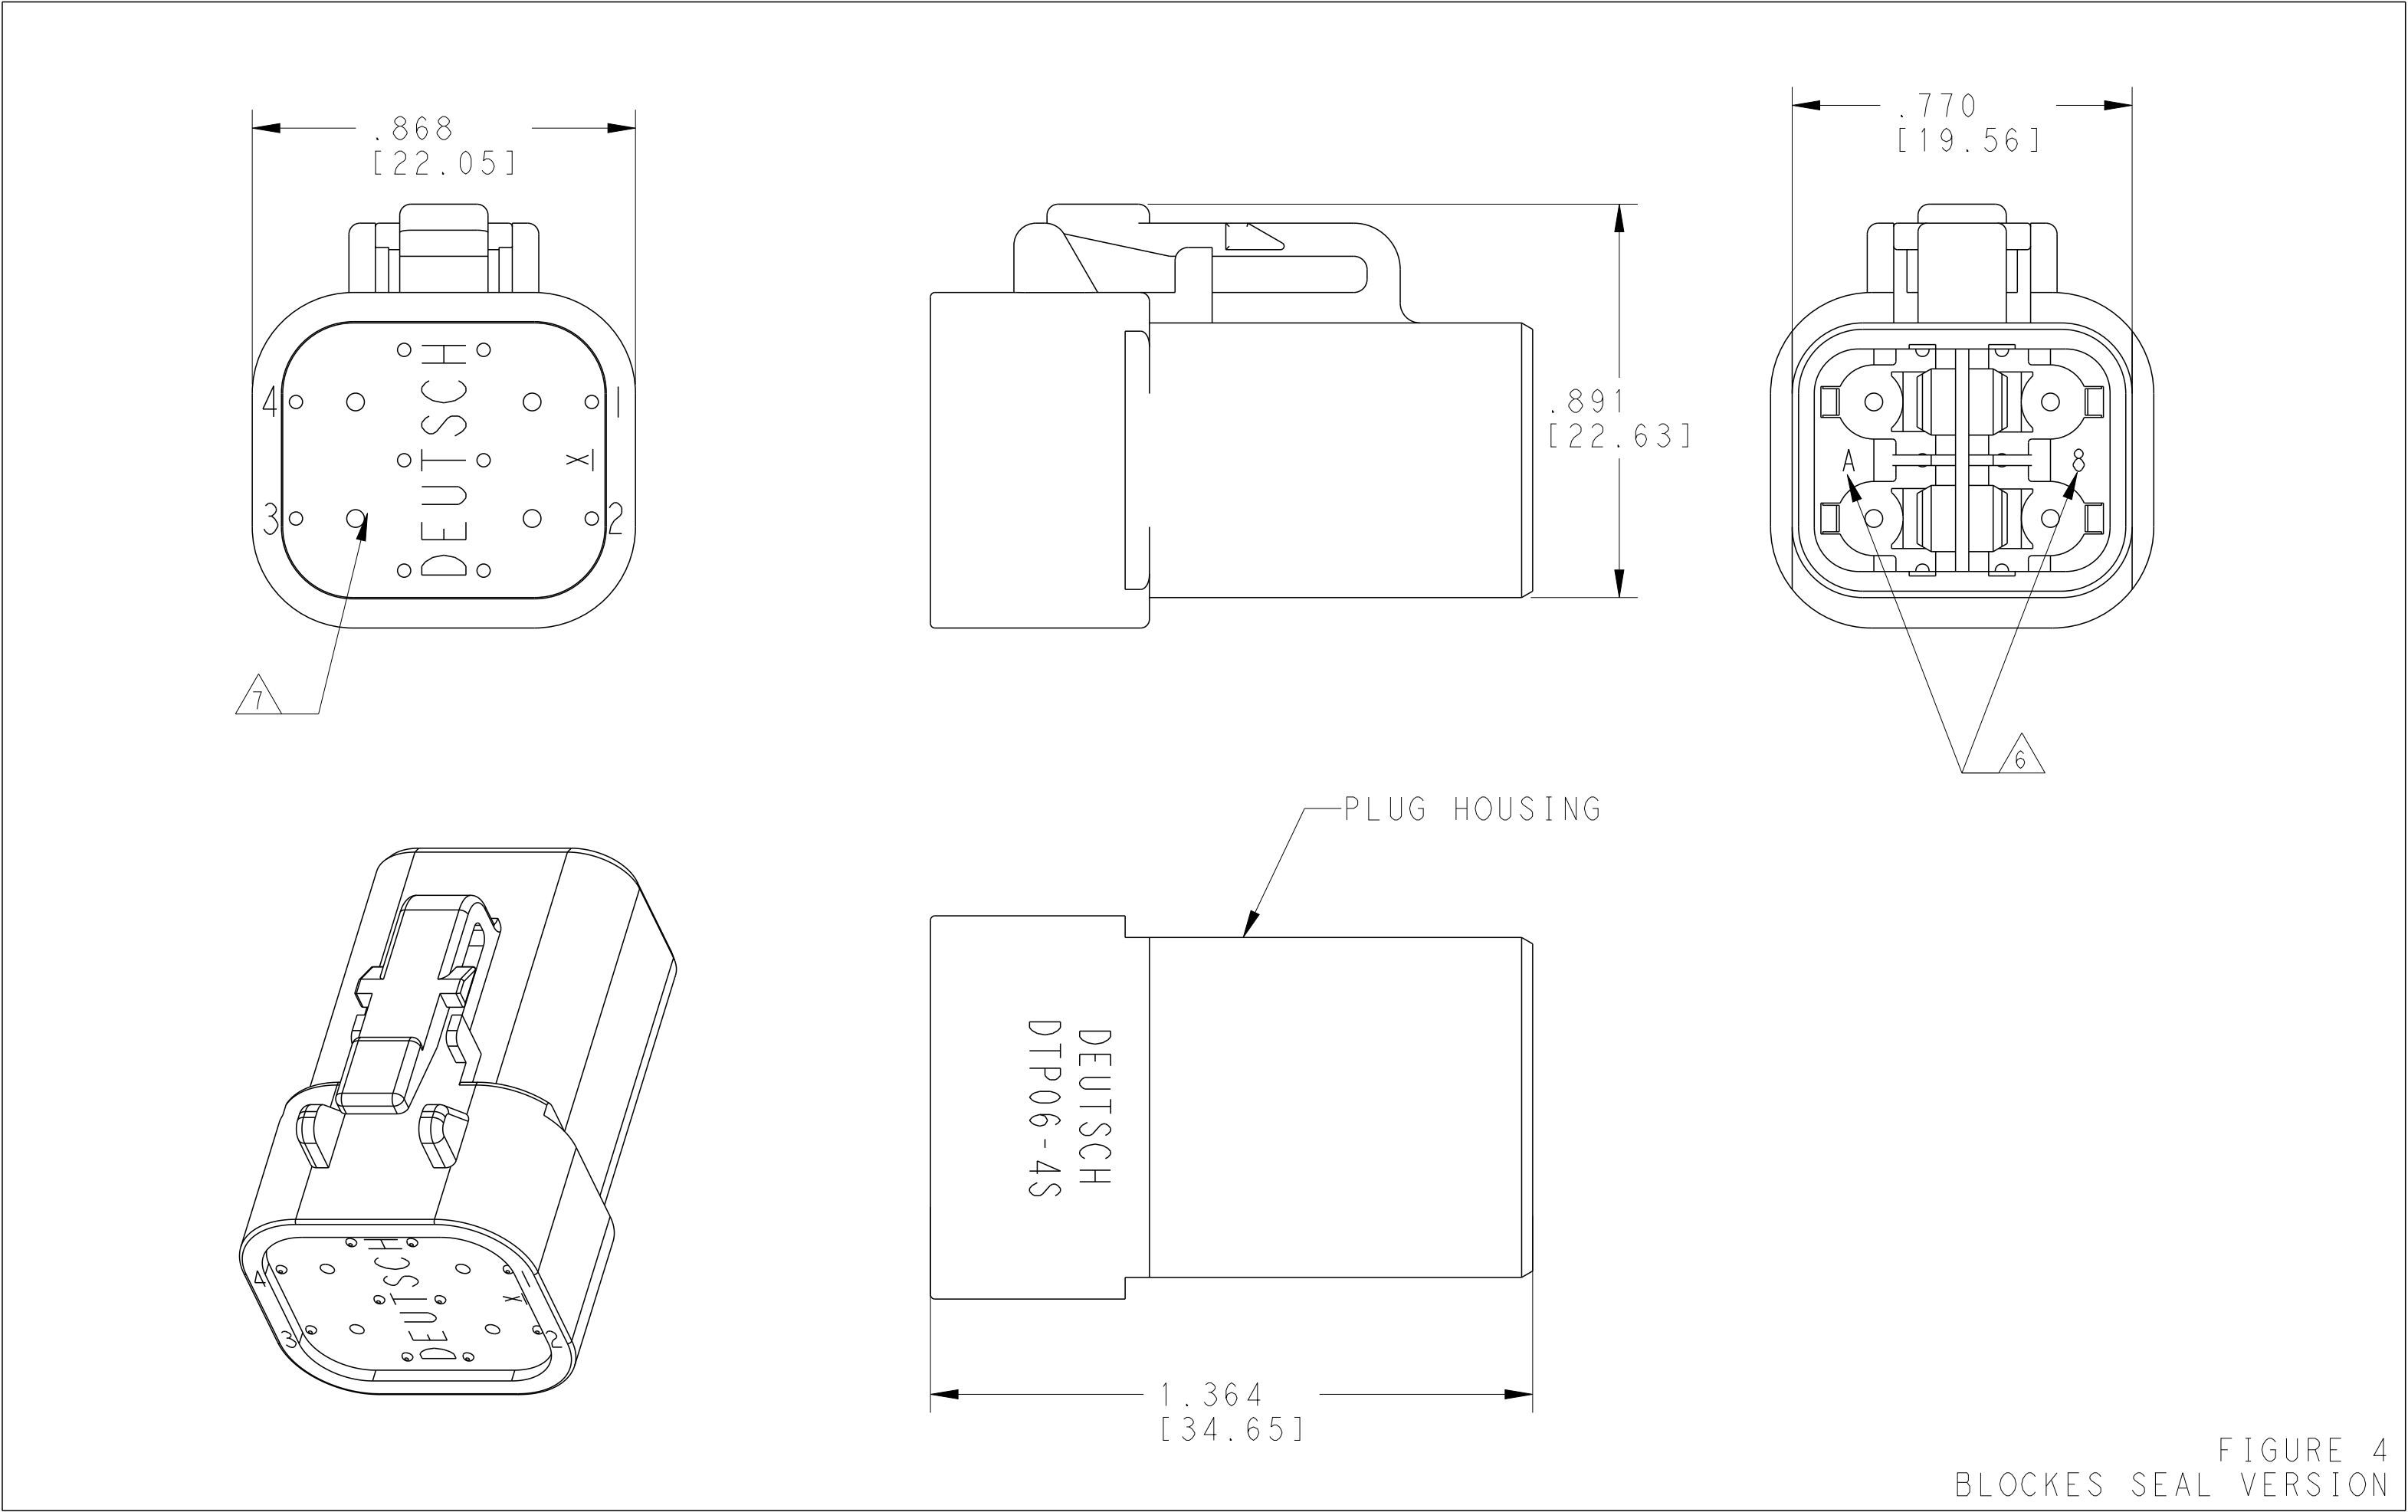


FIGURE 4
BLOCKES SEAL VERSION

PART NUMBER	CONTACT SIZE	WIRE RANGE [mm ²] REF ONLY	SEAL	MIN. INSUL. O. D.	MAX. INSUL. O. D.
DTP06-4S	12	10-14 AWG [5.0-2.0]	STANDARD SEAL	.134 [3.40]	.170 [4.32]
DTP06-4S-E004					
DTP06-4S-E003					
DTP06-4S-EE01					
DTP06-4S-CE01			E SEAL	.097 [2.46]	.158 [4.01]
DTP06-4S-CE02					
DTP06-4S-CE03					
DTP06-4S-C015					

7. MODIFICATION: GROMMET CONTACT CAVITIES ARE BLOCKED.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
IN [mm]

MATERIAL
-
SEE SHEET 1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ± 0.25 (0.64)
4 PLC ±
ANGLES ±
FINISH -

DWN
R. ARAUS
16JAN25

CHK
C. BHATT
16JAN25

APVD
C. BHATT
16JAN25

PRODUCT SPEC
108-151012

APPLICATION SPEC
114-151012

WEIGHT
-

CUSTOMER DRAWING

NAME
4 WAY PLUG, STANDARD SEAL
EXTRA THIN SEAL, BLOCKED SEAL
SHORT AND LONG CAP, DTP SERIES

SIZE
A

CAGE CODE
00779

DRAWING NO
DTP06-4S-XXXX

RESTRICTED TO
-

SCALE
3:1

SHEET
2

OF
2

REV
A